

DUROCK[®] Screws

DUROCK Steel Screws



DUROCK Wood Screws



Specially designed screws for attaching Durock[®] Cement Board to wood or steel framing members

- Available for wood framing and for steel framing.
- Ideal for attachment of cement board.
- Corrosion-resistant coating. Designed to resist 500 hours of salt-spray testing before developing 5% red rust (per ASTM B117).
- Wafer-head design with strip-out-prevention ribs.

Description

DUROCK[®] Screws are high-quality fasteners for use with DUROCK Cement Board. They are corrosion-resistant and have wafer heads with ribs to prevent strip-out. DUROCK Wood Screws are used with wood framing and DUROCK Steel Screws can be used with steel framing where steel thickness is from 0.9 to 1.9 mm (20- to 14-gauge).

Directions

Usage:

- A. DUROCK Wood Screws are used for applying 12.7 mm (1/2") and 15.9 mm (5/8") DUROCK Cement Board to subfloors and counter tops or 12.7 mm (1/2") DUROCK Cement Board to walls or ceilings.
- B. DUROCK Wood Screws, 57 mm (2-1/4") long, are used for applying 12.7 mm (1/2") DUROCK Cement Board and cement board furring strips to walls to create a wall shield for stoves.
- C. DUROCK Steel Screws, 32 mm (1-1/4") long, are used for applying 12.7 mm (1/2") DUROCK Cement Board to walls or ceilings.
- D. DUROCK Steel Screws, 42 mm (1-5/8") long, are used for applying 15.9 mm (5/8") DUROCK Cement Board to walls or ceilings.

Application:


- Use minimum 4-amp screwgun, recommended drill speed 2500 rpm.
- Screw spacing is 200 mm (8") o.c. for walls, 150 mm (6") o.c. for ceilings. Apply screws 9 to 16 mm (3/8" to 5/8") from edges of panels.
- Install screws with bottom of screw-heads tight to board surface. Do not countersink screws.
- Screws must be driven straight to assure optimal performance.

Product Data

Sizes: DUROCK Wood Screws come in two lengths: 32 and 57 mm (1-1/4" and 2-1/4").
DUROCK Steel Screws come in two lengths: 32 and 42 mm (1-1/4" and 1-5/8").

Design: Both wood and steel screws are a wafer-head design with strip-out-prevention ribs and self-drilling points; screwheads are a minimum of 10 mm (0.40") in diameter; driving recess is a No. 2 "Phillips" design.

Packaging: Bulk quantity—5,000 pieces/carton (32 mm [1-1/4"] size), 4,000 pieces/carton (42 mm [1-5/8"] size), 2,000 pieces/carton (57 mm [2-1/4"] size).

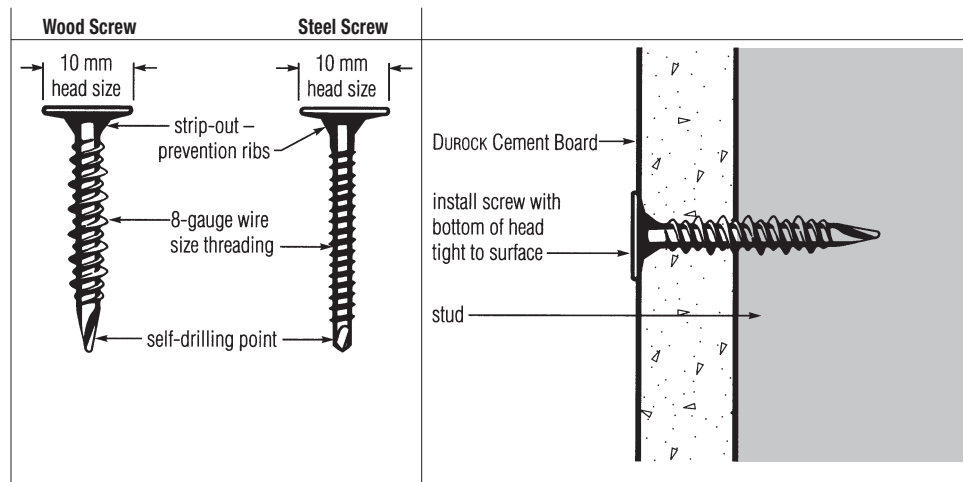

Trademarks:

The CGC logo is a registered trademark of CGC Inc. CGC Inc. is a licensed user of the trademark DUROCK.

Note:

Products described here may not be available in all geographic markets. Consult your CGC sales office or representative for information.

Warranty:

Since methods and conditions of application and use are beyond our control, our warranties of FITNESS and MERCHANTABILITY, and any other warranties, express or implied (including warranty against latent defects), made in connection with the sale of these products and systems, SHALL NOT BE EFFECTIVE OR ACTIONABLE UNLESS the products and systems are applied according to our current printed directions and specifications.

Safety First!

Follow good safety and industrial hygiene practices during handling and installing of all products and systems. Take necessary precautions and wear the appropriate personal protective equipment as needed. Read material safety data sheets and related literature on products before specification and/or installation.