
CGC Ceiling Solutions

CGC ELEGANCE[™]

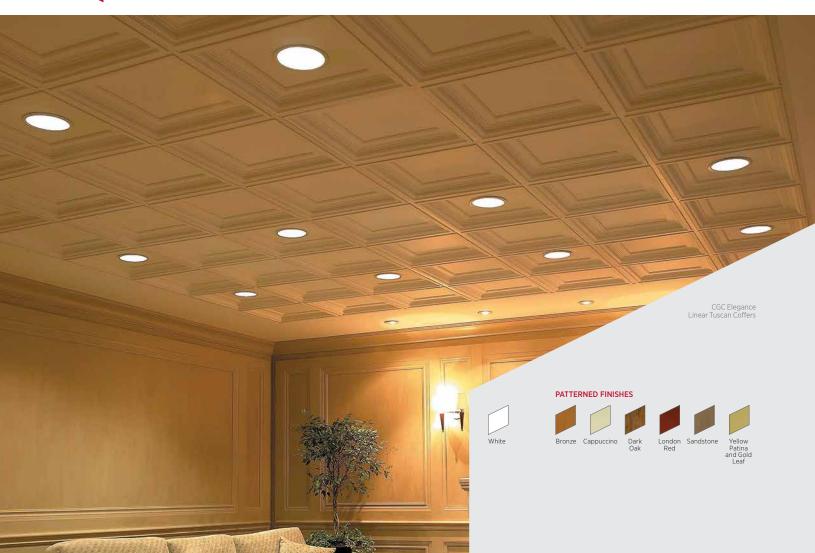


FEATURES AND BENEFITS

- Available in standard 2' x 2' sizes.
- Fits easily into 15/16" CGC Donn® Brand Grid System.
- Class A flame spread when tested to ASTM E84 test standard.
- Manufactured from 70% by volume post consumer recycled glass.
- Pre-cut openings for hardware available or panels can be field-cut on site.
- Available in standard white latex primer.
- Custom colour finishes and designs available upon request.

APPLICATIONS

- Corporate institutions
- Office conferencing areas
- Hospitality
- Residential

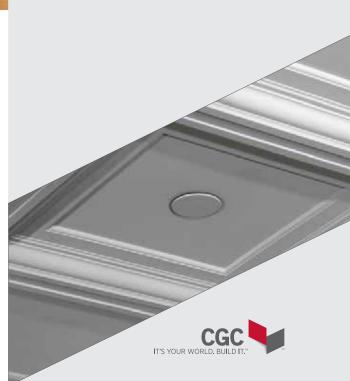


CGC ELEGANCE

CUSTOMER SERVICE Ontario/Atlantic Canada : 800.387.2690 Quebec/Eastern Ontario : 800.361.1310 Western Canada : 800.242.4418 COMPANY WEBSITE cgcinc.com SEE LEED REPORT TOOL for detailed sustainability information, as well as the MOST UP-TO-DATE TECHNICAL INFORMATION, all available at cgcdesignstudio.com

RC HIGH RECYCLED

PRODUCT INFORMATION

| Materials | | Module Size | | | |
|---|-------------|----------------------------|------|---------|----------------------|
| Lightweight gypsum with 70% by volume post-consumer recycled glass. | | Full 2' x 2' modules only. | | | |
| Elegance Panels | Item Number | Size | Edge | Surface | Colour |
| Acanthus Leaf | AL400 | 2' x 2' x 15/16" | SL | Smooth | White/Pattern/Custom |
| Classic Linear | CL120 | 2' x 2' x 15/16" | SL | Smooth | White/Pattern/Custom |
| Egg and Dart | ED200 | 2' x 2' x 15/16" | SL | Smooth | White/Pattern/Custom |
| Linear Tuscan | LT100 | 2' x 2' x 15/16" | SL | Smooth | White/Pattern/Custom |
| Deco Shapes | DS510 | 2' x 2' x 15/16" | SL | Smooth | White/Pattern |
| Perimeter Tile | PT110 | 2' x 2' x 15/16" | SL | Smooth | White/Pattern/Custom |
| Perimeter Tile | PT115 | 2' x 2' x 15/16" | SQ | Smooth | White/Pattern/Custom |

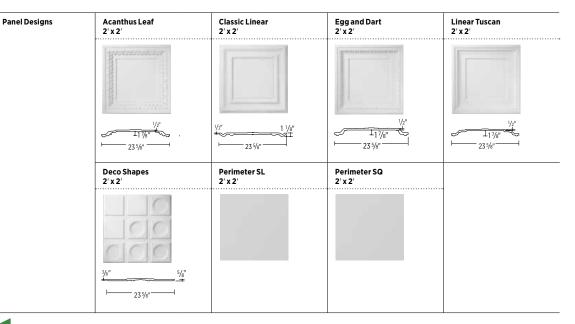

LEGEND

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per U.S. FTC guidelines.

PHYSICAL DATA/NOTES

Product literature Data sheet: IC600

> Finishes Standard white latex primer (contact your local sales representative for details), pattern and custom colours available.

Recycled content

Recycled content: 70%.
ASTM E84 and CAN/ULC S102

surface burning characteristics

Class A Flame spread: 10/15 Smoke developed: 10/15

