




# STRAIT-FLEX® ARCH-STICK

## OUTSIDE 90° ARCHED CORNER BEAD

### DATA SHEET

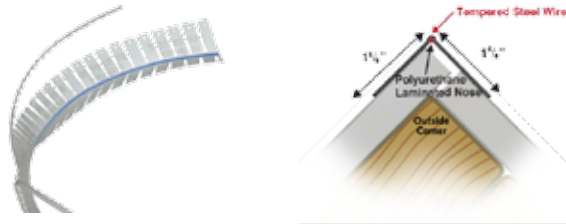

#### DESCRIPTION

- Measures 85 mm (3-3/8") wide
- Tempered steel backbone for perfect arches
- Patented tear strips allow for easy straight to curve transitions
- Double-sided tabs allow for product to curve on both sides

#### ADVANTAGES

- Perfect for arched windows and doors, curved walls, ceilings, soffits and staircases
- Nose profile matches most corner beads
- Second coat of compound can be applied immediately - very light skim coat to finish
- Easily installs using standard compounds - No special tools or fasteners needed
- Clean installation - No mess
- Waterproof, rustproof

#### LIMITATIONS

- Designed for 90° arches
- Not for use with solvents or solvent-based paints that could degrade the adhesive
- Maintain 13 °C (55 °F) minimum temperature within the building during and after installation

#### PACKAGING

- Available in 10 ft length
- 25 pcs - 250 lf (10 ft cases, AS-10)

#### INSTALLATION

Measure entire curved application. Cut to measured length. Remove tear strip by folding along perforations and pulling. Leave tear strip intact where a straight to curve is required. Apply all-purpose compound to corner and install Strait-Flex® Arch-Stick starting from the middle of arch, pressing firmly into compound in both directions. Wipe down compound and adjust to a smooth curve. Apply second coat immediately and let dry. Apply final coat, let dry and sand.

#### WARRANTY

When applied to a sound structure using recommended application instructions, this product is backed by Strait-Flex Limited Warranty against edge cracks or flange deformations. Strait-Flex products withstand reasonable forces that cause edge cracking and flange deformation. Warranty does not apply to impacts. Refer to Strait-Flex Limited Warranty for complete warranty details.

#### STORAGE

Store in a dry place protected from moisture.

#### PRODUCT INFORMATION

See [cgcinc.com](http://cgcinc.com) for the most up-to-date product information.

#### NOTE

Products described here may not be available in all geographic markets. Consult your CGC sales office or representative for information.

#### TRADEMARKS

The trademarks CGC, STRAIT-FLEX, THE CGC LOGO, and related marks are trademarks of USG Corporation or its subsidiaries or its affiliates.

#### NOTICE

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused

by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

#### SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read MSDS and literature before specification and installation.

