


USG PARALINE® I, II, AND, III LINEAR METAL SYSTEMS

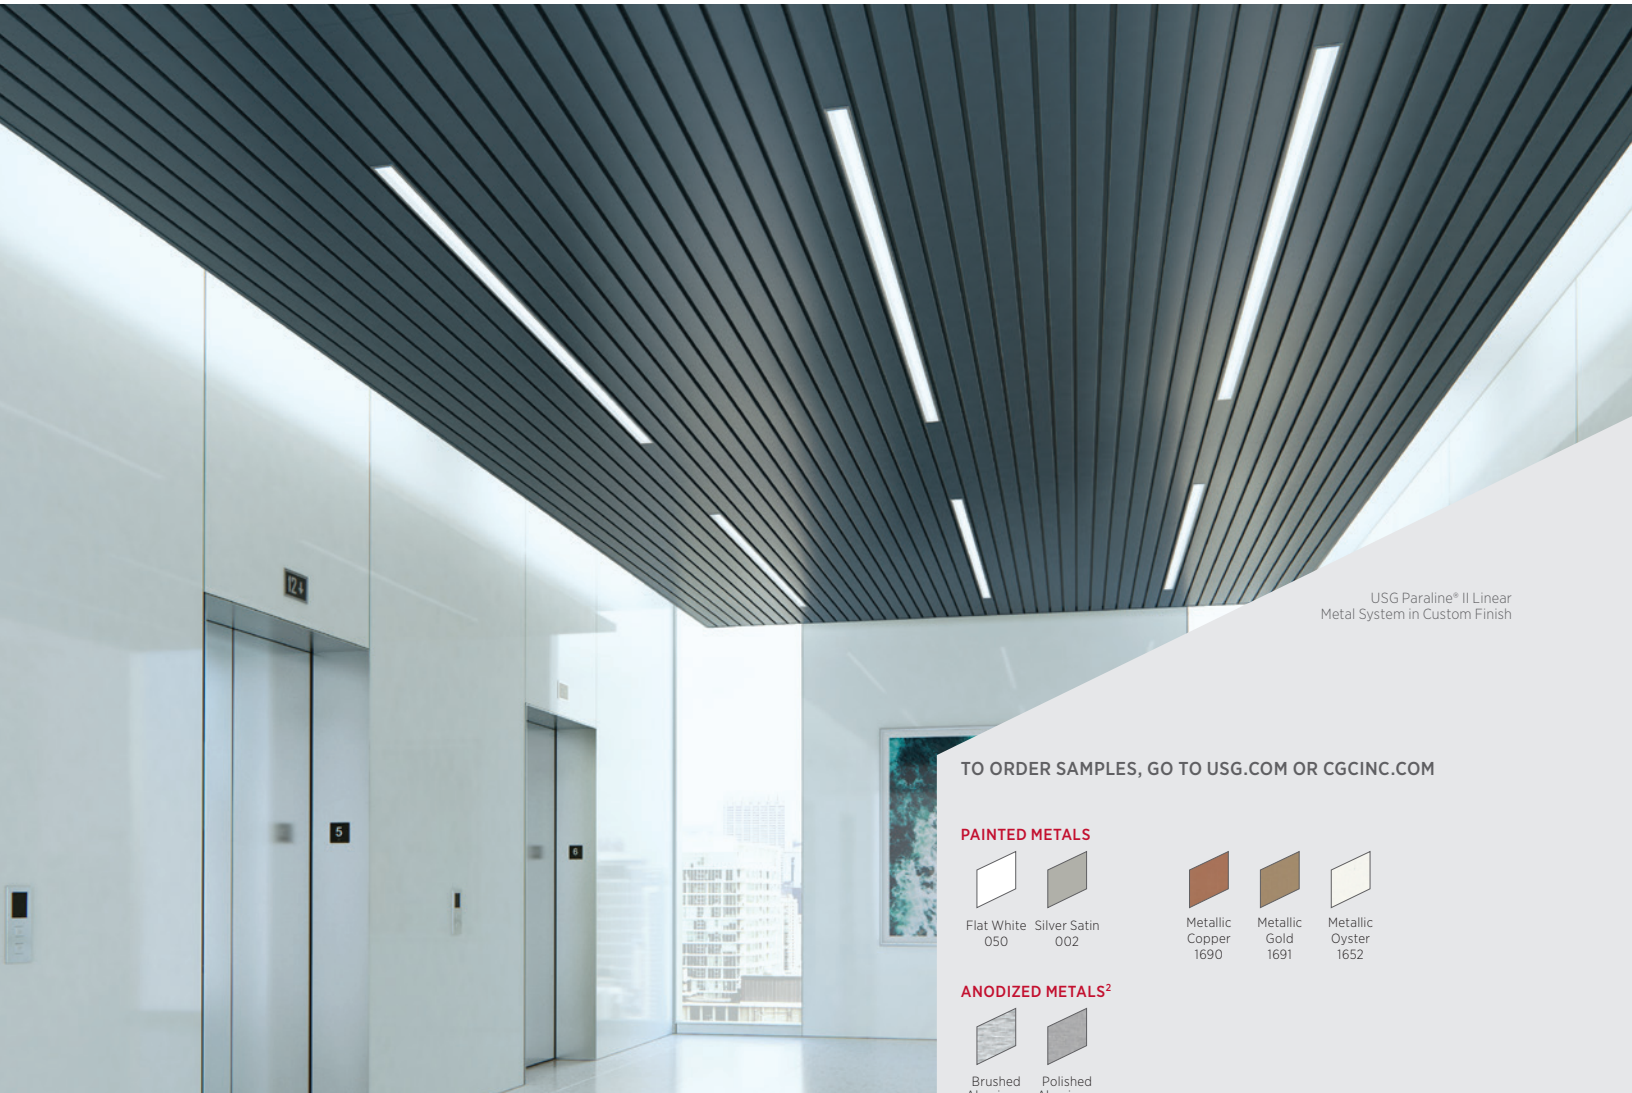

USG Paraline® II Linear Metal System in Custom Finish

FEATURES AND BENEFITS


- Elegant linear metal ceiling system features 12' long metal pans attached to a specially engineered suspension system.
- Closed-reveal USG Paraline® II are appropriate for exterior ceiling applications under protected soffits.
- Paraline® II wind load tested and approved for exterior applications with proper bracing and framing.
- Snap-up design offers unlimited access with minimum plenum depth requirements.
- Available with perforated pans for USG Paraline® II for NRC ratings as high as 0.95.

APPLICATIONS

- Interior and Exterior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Sloped Ceilings
- Curved Ceilings
- Wall Mount
- New Construction or Renovation
- Downward Accessible Ceilings
- Concealed Grid

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS



ANODIZED METALS²



CUSTOM COLORS AVAILABLE



USG PARALINE® I, II, AND III LINEAR METAL SYSTEMS

ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800.USG.4YOU (874-4968)




**FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com




PRODUCT INFORMATION

Materials	Typical Sizes	Finishes
USG Paraline® I, II, and III: Aluminum	3-1/4" x 12'; 7-1/4" x 12'	Painted or anodized (Paraline® III not available Anodized or in Metallic finishes.)

DETAILS


USG Paraline® I (Not available perforated)	USG Paraline® II	USG Paraline® III (Not available perforated)
 <p>USG Paraline® I ceilings use 3-1/4" wide pans with roll-finished edges. Once assembled, the pans provide an open reveal for excellent acoustical control (sound is absorbed by acoustical material in the plenum).</p>	 <p>USG Paraline® II ceilings maintain the 3-1/4" wide pan dimension, but are constructed with integral flanges that overlap to form a reveal closure that is appropriate for exterior soffit applications. Perforated available.</p>	 <p>USG Paraline® III ceilings have bolder, 7-1/4" wide pans for larger-scale applications. Pans have a roll-finished edge to provide the same open reveal as USG Paraline® I with similar acoustical control.</p>

USG PARALINE® II PERFORATION PATTERN



Perforation Pattern CD06305NB (A062)
Perforation on horizontal face only.
Perforation shown actual size.

PERSPECTIVE

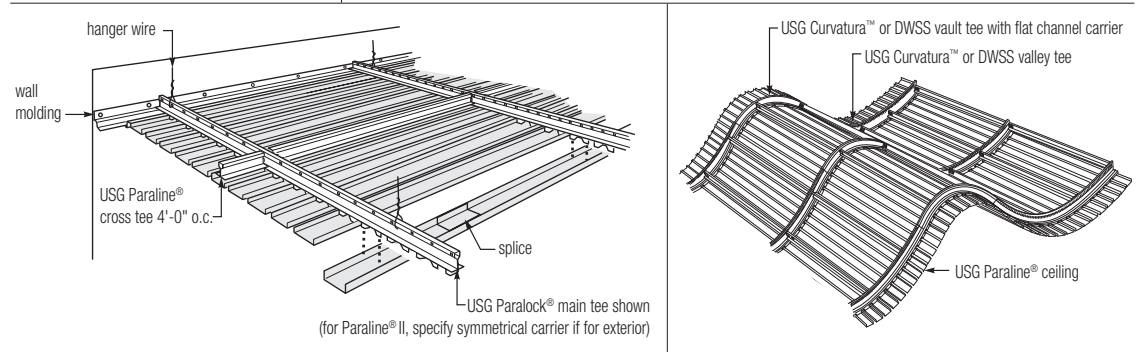

Low Emissions (VOC)
CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

High Recycled Content
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

PHYSICAL DATA

Product literature
System brochure: IC463
Data sheet: IC315
Exterior ceiling systems guide: SC2561
Warranty: SC2102
Specification: IC675
Care and maintenance: IC518

Online tools
usgdesignstudio.com or cgcdesignstudio.com

ASTM E84 and CAN ULC S102 surface-burning characteristics (with Acoustibond™ backer)
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Fire-rated designs
UL fire-rated design number D-218 rating for two-hour or three-hour restrained or unrestrained assembly and three-hour unrestrained beam rating.

Light reflectance
Flat White: LR-0.80 (less with perforations and other colors).

Code approval
See PER-12055.

Limitation
Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction Association.

Carrier systems
The carrier systems for the various USG Paraline® systems are not interchangeable and different carrier types may be required for exterior applications. For more information about the various USG Paraline® systems & components, please consult the appropriate Systems Guide. For more information about exterior applications with Paraline® refer to SC2561.

Notes
1. Perforation Pattern CD06305NB (A062) is available on USG Paraline® II only
2. Paraline® I & II available in Metallic Copper, Gold and Oyster.
3. Paraline® III not available in Anodized or in Metallic finishes.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC315/rev. 6-22
© 2022 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CURVATURA, PARALINE, PARALOCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

