



USG TRANSLUCENTS™ INFILL PANELS

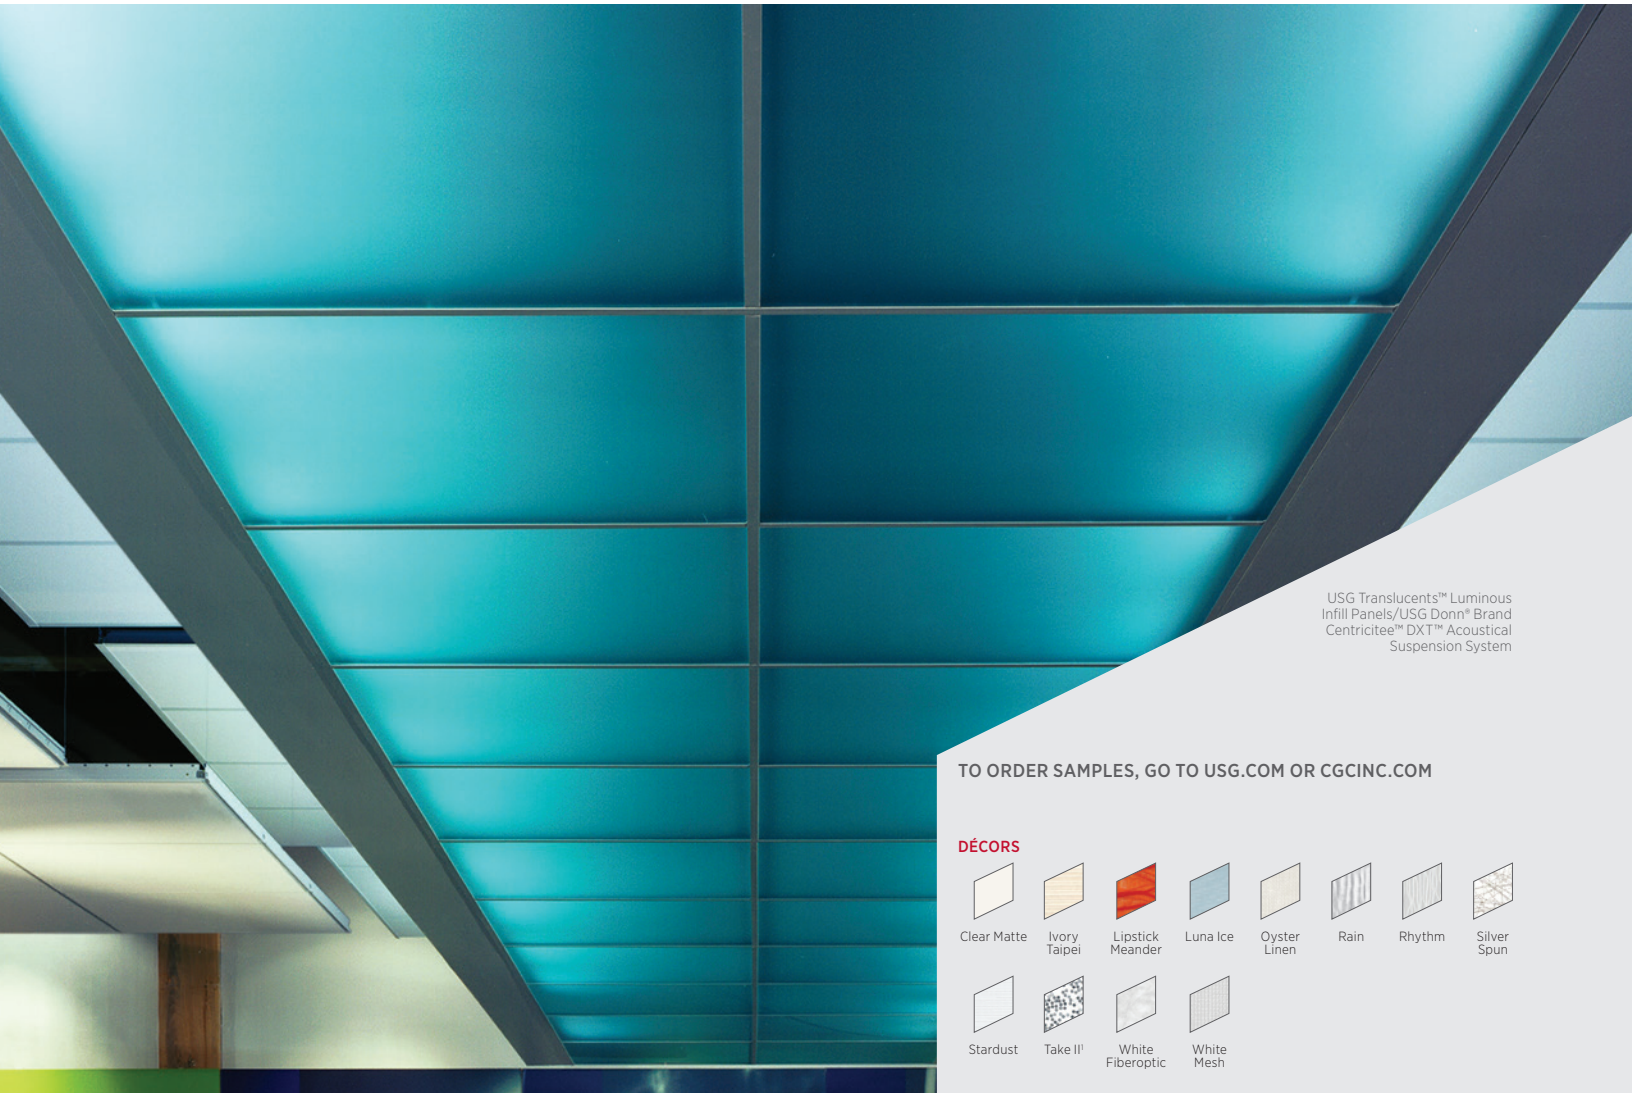

USG Translucents™ Luminous
Infill Panels/USG Donn® Brand
Centricitee™ DXT™ Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

DÉCORS

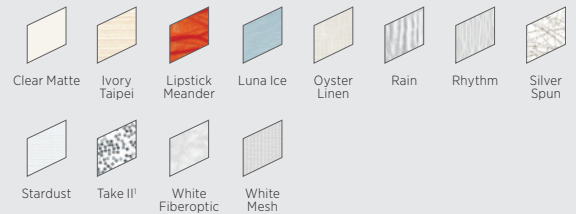

FEATURES AND BENEFITS

- Fully accessible translucent infill panels.
- Panels can be used with standard USG Donn® Brand DX®, Centricitee™ DXT™, Curvatura™, Identitee® DXI™, Finline® DXF™ 3-Dimensional and GridWare™ Open Cell Decorative suspension systems.
- Available in a variety of decors that feature embedded fabrics and other materials as well as solid colors.
- 2'x2' panels (23-3/4"x23-3/4") in all finishes.
- 2'x6' panels (23-3/4"x71-3/4") in all finishes. (Except Clear Matte available in 2'x2' only)
- USG Translucents™ panels contain a minimum of 40% recycled content.

APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Sloped Ceilings
- Curved Ceilings
- New Construction or Renovation
- Backlit Ceilings

COLOR GALLERY*



USG TRANSLUCENTS™ LUMINOUS INFILL PANELS

ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800.USG.4YOU (874-4968)

**FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL**
usgdesignstudio.com
cgcdesignstudio.com

PRODUCT INFORMATION

Product	Typical Sizes		System Weight
	Nominal	Actual	
Clear Matte .060" Polycarbonate	2'x2'	23-3/4"x23-3/4"	Approximately .374 lb./sq. ft.
Standard Décors – 0.118" PETG (excluding Take II)	2'x2' 2'x6'	23-3/4"x23-3/4" 23-3/4"x71-3/4"	Approximately 0.9 lb./sq. ft.
Rain ² 0.118" Acrylic	2'x2' 2'x6'	23-3/4"x23-3/4" 23-3/4"x71-3/4"	Approximately 0.9 lb./sq. ft.
Take II ¹ 0.236" PETG	2'x2' 2'x6'	23-3/4"x23-3/4" 23-3/4"x71-3/4"	Approximately 2 lb./sq. ft.
Color Gallery – 0.118" PETG	2'x2' 2'x6'	23-3/4"x23-3/4" 23-3/4"x71-3/4"	Approximately 0.9 lb./sq. ft.

Acoustics

This product does not offer any acoustical properties.

Lighting

For USG Translucents™ panels, fixtures should be placed a minimum of 18" above the ceiling and 18" o.c. for best results. For best results when backlighting use Gridware grid components.

Suspension Systems

Lays into standard USG Donn® Brand DX®, Centricitee™ DXT™, Curvatura™ 3-Dimensional and GridWare™, DXI and DXF suspension systems.

PHYSICAL DATA

Product literature

Data sheet: IC406
Care and Maintenance: IC456

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Fire rating

USG Translucents™ panels meet the Class A acceptance criteria of 2021 IBC Section 803.1.1.1 for interior finishes as tested in accordance with NFPA 286.

USG Translucents™ panels meet the Class B requirements for flame spread and smoke developed as tested in accordance with CAN/ULC S102 surface-burning characteristics.

Recycled content

Decors: min. 40% recycled content. 100% recyclable. Rain: 40% recycled content. 100% recyclable. Color Gallery: Up to 40% recycled content.

Limitations

This product is produced to order and will vary from batch-to-batch - panels ordered at the same time will be produced together and will be identical. USG cannot guarantee batch-to-batch consistency.

Note:

When backlighting, consult a lighting engineer to achieve even illumination by minimizing shadowing caused by other ceiling components.

Notes

- Take II not offered with Curvatura 3D due to material thickness.
- Rain (Acrylic) is class C
- Custom color available by overlapping up to 3 films.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC406/rev. 10-23

© 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CURVATURA, DONN, DX, DXI, DXF, DXT, FINELINE, GRIDWARE, IDENTITEE, TRANSLUCENTS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

