



USG Ceilings Plus® WALLFORMS™

FORMED WALL PANEL SYSTEM

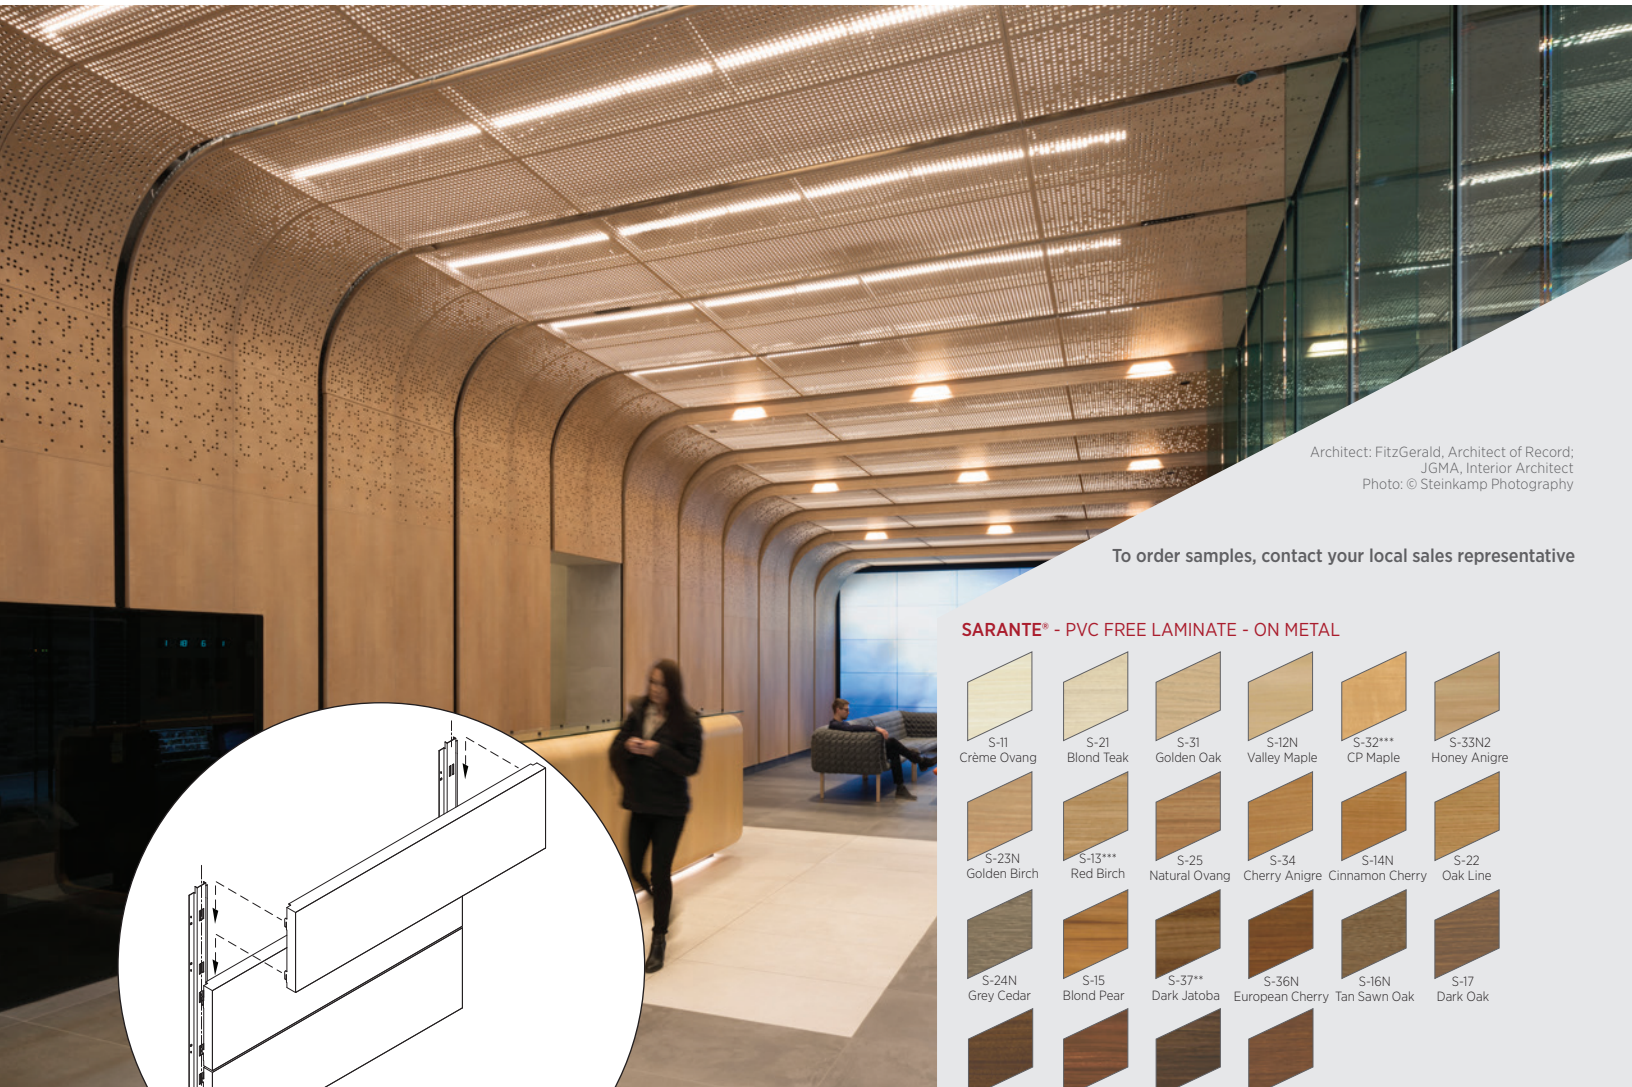


Architect: FitzGerald, Architect of Record;
JGMA, Interior Architect
Photo: © Steinkamp Photography

To order samples, contact your local sales representative

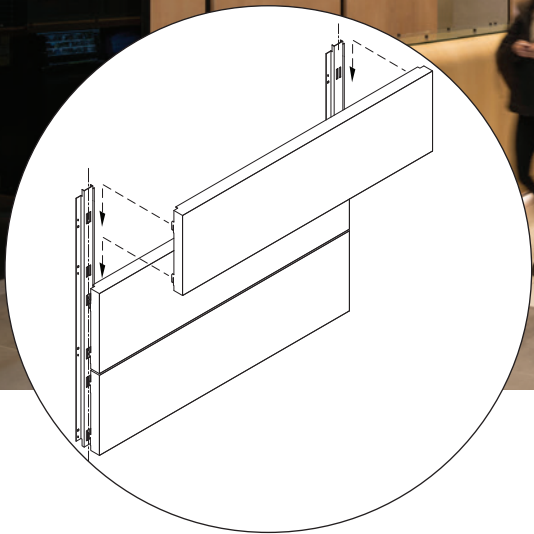


SARANTE® - PVC FREE LAMINATE - ON METAL

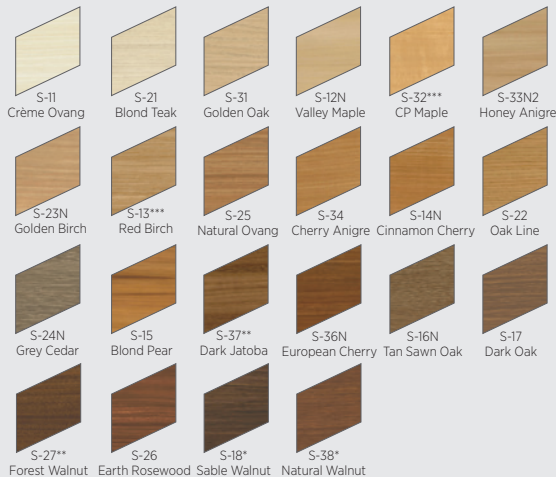


ARBOREAL® - REAL WOOD VENEER - INTERIOR ONLY - ON METAL



ANODIZED - ON METAL



PAINTED - ON METAL



FEATURES AND BENEFITS

- Fully accessible system that allows access at every panel location.
- Third party integration of lights (independently attached to studs).
- Acoustical performance utilizing perforations and sound absorbing materials.
- Standard and customizable perforations are available to create visual patterns.
- Design flexibility with panel sizes and layout options.
- Slotted-hat channel or direct mount options are available.
- Drywall backer necessary below 5 feet to increase durability.
- Class A per ASTM E84, Zero Flame Spread, non-combustible aluminum core Fire Classification.

APPLICATIONS

- Interior and Exterior Applications
- Wall Applications
- Sloped Walls
- Curved Walls
- New Construction

USG Ceilings Plus® WALLFORMS™

FORMED WALL PANEL SYSTEM





ORDER SAMPLES/LITERATURE
Contact your local sales rep.

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
Contact your local sales rep.


TECHNICAL SERVICES
Contact your local sales rep.

Declare. Declare® Labels on select finishes, see usg.com for more details and documentation.


PERFORMANCE OPTIONS

Application	Grid Options	Finish	Accessibility	Item No.	Acoustics	NRC	Perforation	Fire Rating	Recycled Content	Maintenance
Interior, Exterior	 Slotted Hat Channel or Direct Mount	Arboreal, Sarante, Anodized, Painted	Full Upward	---	Acoustibond, Ultrasorb	 Up to 0.95 (Requires perforations and acoustic backfill)	Standard, Custom	 Class A, ASTM E84 CAN/ULC S102	 Up to 90%, finish dependent (hardware excluded)	See architectural specification

DESIGN PARAMETERS

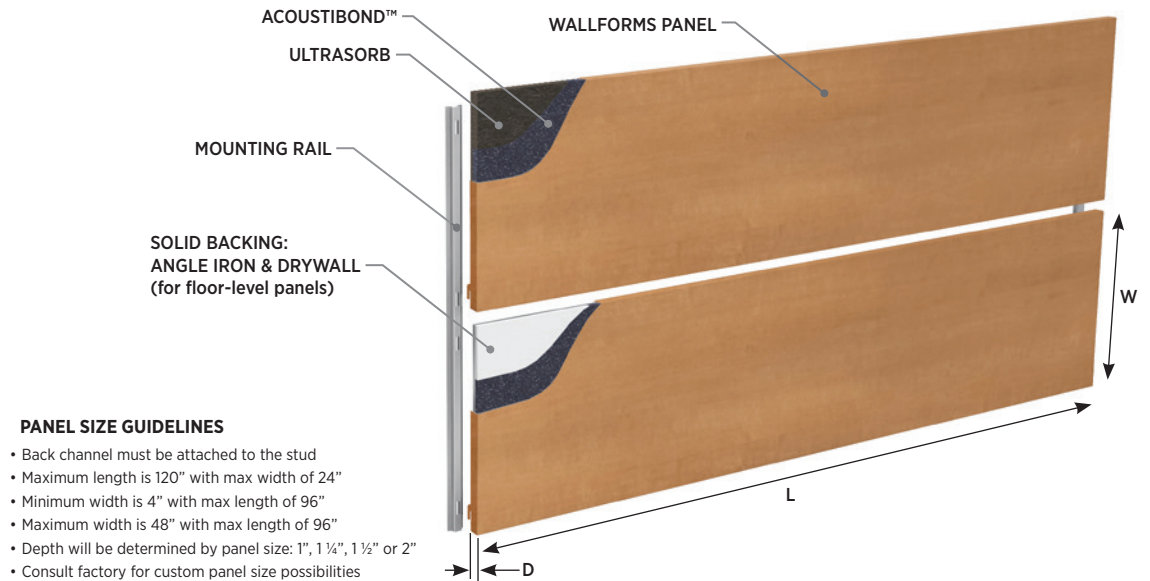

DETAIL & ACCESSORIES

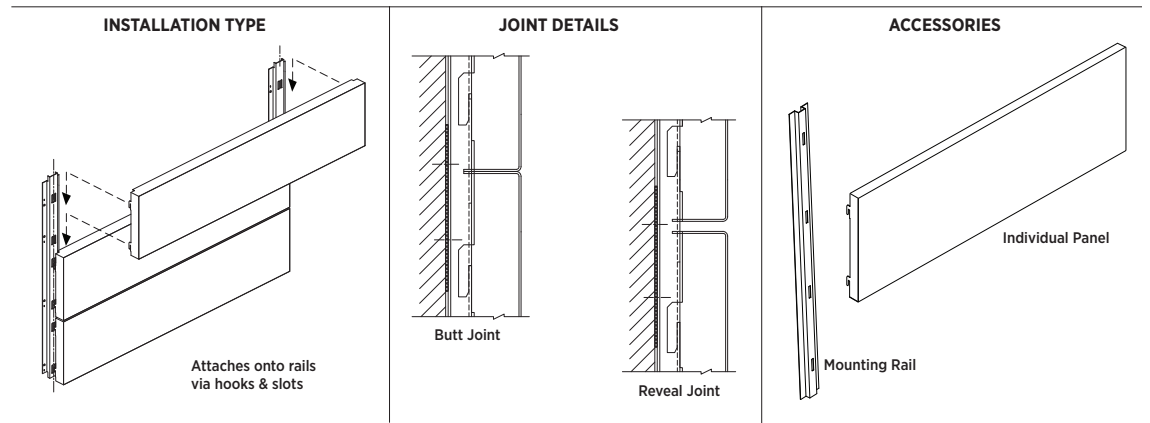

PHYSICAL DATA

Product Literature
Please contact your local sales representative for the following documents:

Architectural Specification
Installation Manual
Cleaning Instructions: IC518
Warranty: SC2102

Fire Classification
ASTM E84 and CAN/ULC S102 Surface burning characteristics
Class A
Flame Spread: 25 or less
Smoke development: 50 or less

Integration
Wallforms can accommodate a full range of Third-Party systems for any design intent. Air diffusers, speakers, and other accessories can be independently attached to studs behind our panels. CAD details are available online at www.ceilingplus.com.

Modification
Panels are easily modified in the field with standard tools. See our full list of CAD details.

Acoustics
Utilizing perforations and sound absorbing materials, we can meet your NRC requirement with Acoustibond and/or Ultrasorb. Fiberglass batts and duct liner are available upon request.

Footnotes
* Available in exterior
** Available in 48" wide
*** Available in both exterior and 48" wide

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC5415/rev. 10-23
© 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CEILINGS PLUS, CGC, ACOUSTIBOND, ARBOREAL, BLANCO MAT, SARANTE, WALLFORMS, the USG/CGC logo, the Ceilings Plus logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

